



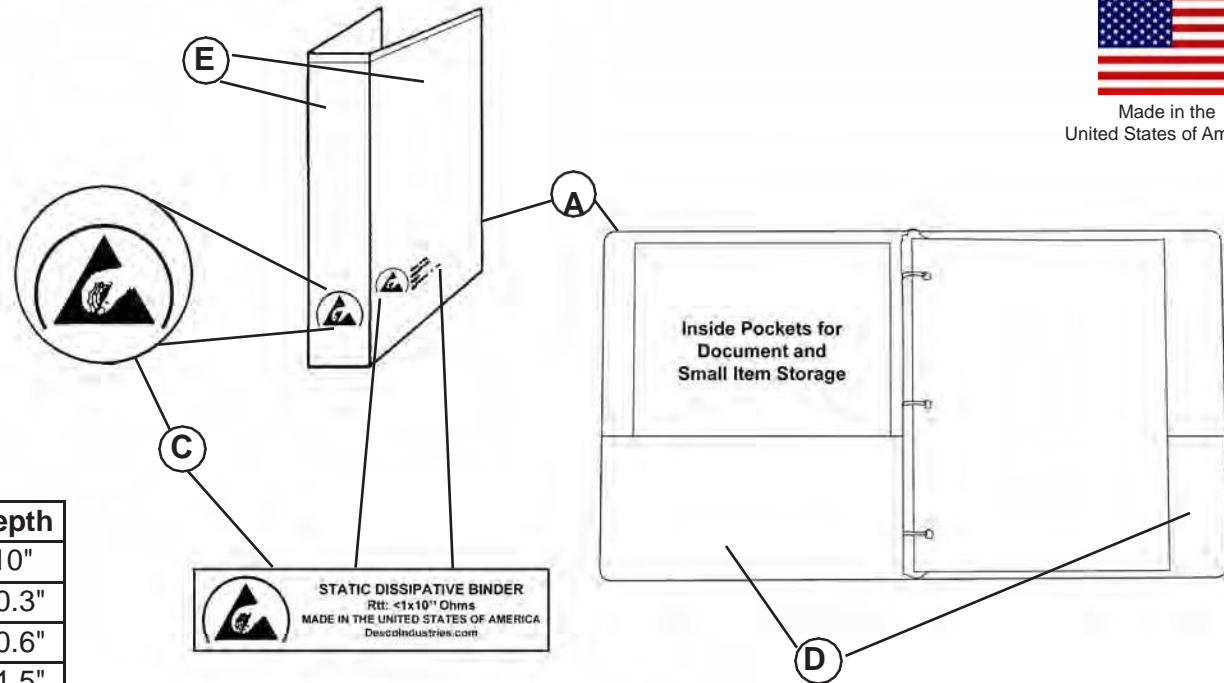

Made in the United States of America

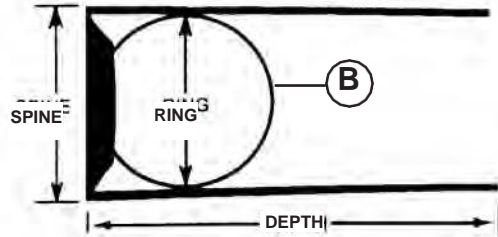

Blue	Yellow	Spine	Ring	Depth
07430	07440	1.2"	0.5"	10"
07431	07441	1.7"	1"	10.3"
07432	07442	2.3"	1.5"	10.6"
07433	07443	2.9"	2"	11.5"
07434	07444	4.2"	3"	12"

**A.** MATERIAL 0.016" (16 mil)\* static dissipative vinyl over cardboard stiffener. Heat sealed on all edges. Surface Resistance =  $1 \times 10^8$  to  $< 1 \times 10^{11}$  ohms per ANSI/ESD STM11.11. Static Decay =  $< 0.30$  seconds

**B.** Ring constructed of nickel plated steel.

**C.** The lower spine is hot stamped with the ESD protective symbol and the lower left front is hot stamped with the ESD protective symbol and "STATIC DISSIPATIVE BINDER Rtt:  $< 1 \times 10^{11}$  Ohms MADE IN THE UNITED STATES OF AMERICA DescoIndustries.com" Binder marked with ESD protective symbol as required by ANSI/ESD S541.

**D.** Two Interior Static Dissipative Pockets for additional storage - for easy and quick access.

**E.** Static Dissipative Clear Overlay Pocket (front, back, spine). Surface Resistance =  $1 \times 10^8$  to  $< 1 \times 10^{11}$  ohms per ANSI/ESD STM11.11.

"It should be understood that any object, item, material or person could be a source of static electricity in the work environment. Removal of unnecessary nonconductors, replacing nonconductive materials with dissipative or conductive materials and grounding all conductors are the principle methods of controlling static electricity in the workplace, regardless of the activity." IESD Handbook ESD TR20.20 section 2.4 Sources of Static Electricity]

Specifications and procedures subject to change without notice.

\*Tolerance Thickness:  $\pm 10\%$

All other Dimensions are  $\pm 1/16"$

### 3 Ring Dissipative Binders with Pockets



**DESCO WEST:** 3651 WALNUT AVE., CHINO, CA 91710 WEB SITE: Desco.com  
PHONE (909) 627-8178  
**DESCO EAST:** ONE COLGATE WAY, CANTON, MA 02021-1407  
PHONE (781) 821-8370

**DRAWING NUMBER**  
07430

**DATE:**  
September  
2013

