




# Personal Grounding



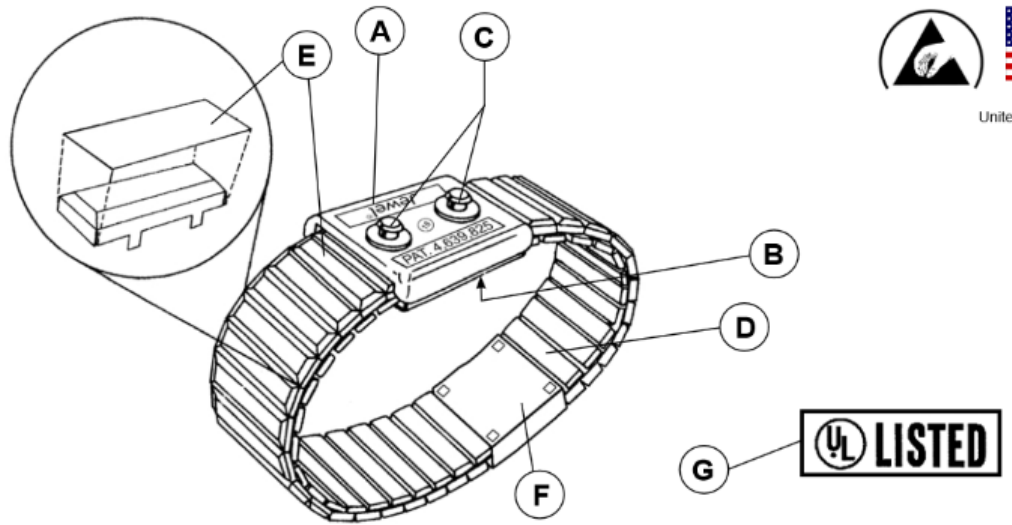

  
 Made in the  
 United States of America

A. Black ABS plastic cap.

B. 300 series stainless steel backplate (0.015" thick).

C. Two 4mm snap studs machined from 300 series stainless steel. Fits to 4mm spring loaded medical type socket. Coil cord disengages from snap with 1-5 lbs. of perpendicular force. Compatible with Desco Dual-Wire Coil Cords ONLY (not including MagSnap® or MagSnap360™ products).

D. Premium metal expansion wrist strap. Inside links are constructed of 300 Series Stainless Steel. Width of links is 0.630".

E. .002" polyphenylsulfone sheet is laminated to each link before assembly. Provides >5,000 volt RMS insulation per ASTM D149. Will not flake or peel.

F. Black ABS plastic insulator separates band into halves.

G. Underwriters' Laboratory listed 90P1C. Meets required limits of ANSI/ESD S20.20 and requirements of ANSI/ESD S1.1.

ITEM	BAND SIZE	CIRCUMEFERENCE		WIDTH
		MIN	MAX	
19844	Small	5.5" (140mm)	9" (229mm)	0.630"
19842	Medium	6" (152mm)	11" (279mm)	0.630"
19840	Large	7" (178mm)	12" (305mm)	0.630"

Specifications and procedures subject to change without notice.  
 Unless otherwise noted, tolerance ±10%  
 \*U.S. Patents 6,052,053 and 6,205,408

See Drawing 09163 for details on Jewel® Coil Cords

<b>Jewel® Premium Metal Expansion Dual-Wire Wrist Strap, 4mm</b>		
DESCO WEST: 3651 WALNUT AVE., CHINO, CA 91710 WEB SITE: Desco.com PHONE (909) 627-8178 FAX (909) 627-7449 DESCO EAST: ONE COLGATE WAY, CANTON, MA 02021-1407 PHONE (781) 821-8370 FAX (781) 575-0172	<b>DRAWING NUMBER</b> 09165	<b>DATE:</b> November 2016