


Personal Earthing

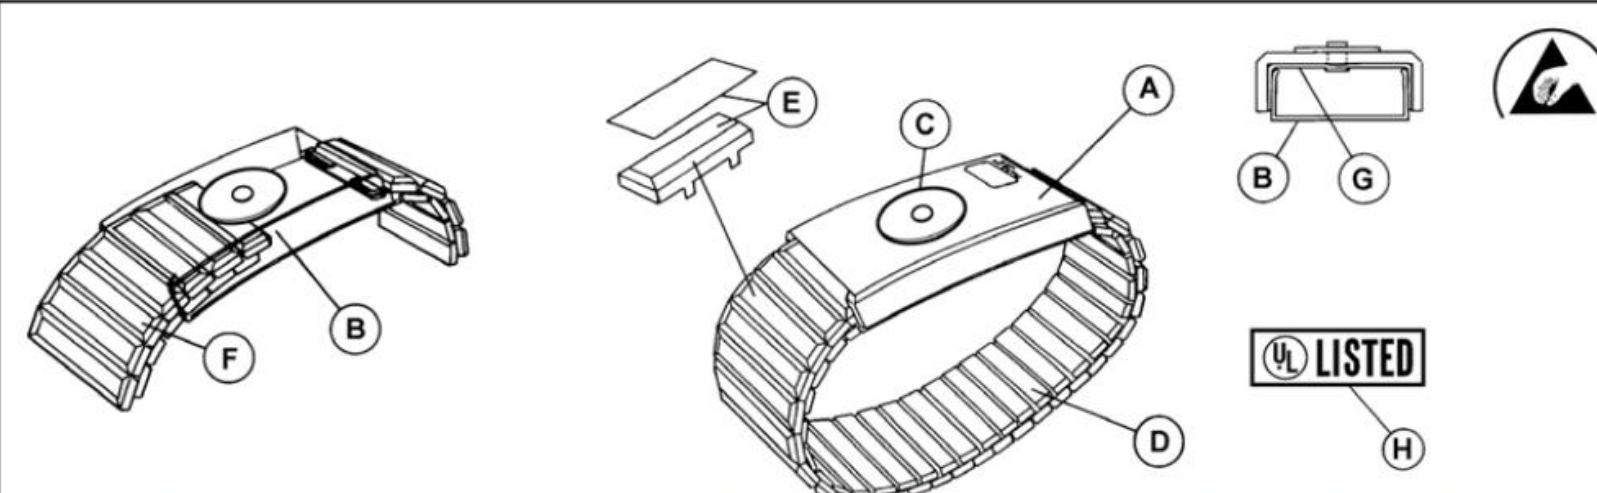

A. Fixed black ABS cap with slotted opening to allow size adjustment.

B. 300 Series Stainless Steel Backplate forms channel to hold up to 10 links of band allowing size adjustment.

C. Machined nickel plated steel stud. Fits Desco's MagSnap® coil cords. Coil cord disengages from from snap with 1-5 lbs. of perpendicular force.

D. Metal expansion wrist strap. Inside links are constructed of 300 Series Stainless Steel. Width of links is 0.630". Minimum Circumference: 5.75" and Maximum Circumference: 13".


E. 0.002" polyphenylsulfone sheet is laminated to each link. Provides >5,000 volt RMS insulation per ASTM D149. Scratch resistant. Color onyx (black).


F. Size is adjusted by sliding 1 to 10 links of the band into the backplate "C" channel.

G. 300 Series Stainless Steel clip for electrical contact between stud and backplate.

H. Underwriters Laboratory listing 90P1C.

Meets ANSI/ESD S20.20 and Wrist Strap standard ANSI/ESD S1.1.

 H

 Made in the United States of America

Unless otherwise noted, tolerance $\pm 10\%$
Specifications and procedures subject to change without notice.

Standard items that include Mag Snap Metal Expansion Wristbands

Item	Description	Cord Style	Accessories
09186	Wristband	N/A	None
09187	Wrist Strap	6 Foot MagSnap® Coil Cord	Alligator Clip
09188	Wrist Strap	12 Foot MagSnap® Coil Cord	Alligator Clip
09204	Wrist Strap	6 Foot MagSnap® Coil Cord with Right Angled Banana	None
09205	Wrist Strap	12 Foot MagSnap® Coil Cord with Right Angled Banana	None

Meets ANSI/ESD S1.1 wristband resistance interior < 100 kilohms (< 1×10^2 ohms)
Meets ANSI/ESD S1.1 wristband resistance exterior > 10 megohms (> 1×10^7 ohms)

DESCO

MagSnap® Metal Expansion Wristband

DESCO WEST: 3551 WALNUT AVE., CHINO, CA 91710 WEB SITE: Desco.com, PHONE (909) 627-3173	DRAWING NUMBER 09204	DATE: September 2013
DESCO EA ST: ONE COLGATE WAY, CANTON, MA 02021-1407 PHONE (781) 821-8370		

© 2013 DESCO INDUSTRIES INC.
Employee Owned