


Personal Earthing

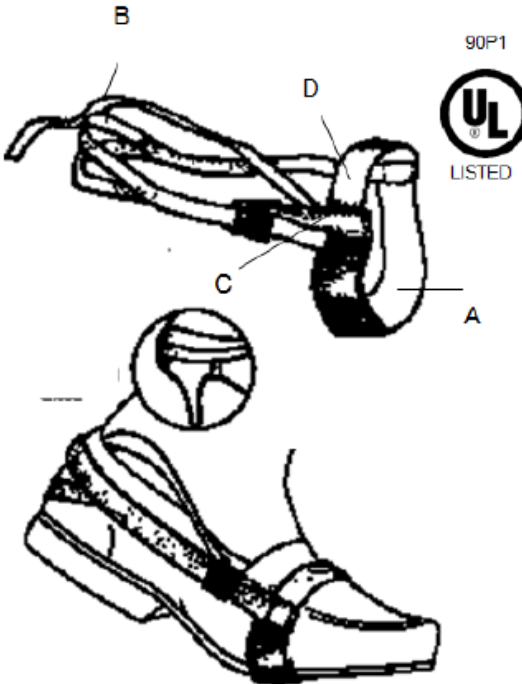

90P1
UL
LISTED

Description:

The 17222 Toe Ground provides a continuous ground path between an operator and a properly grounded ESD protected flooring. These toe grounders are designed for use on standard shoes, including high heeled shoes. They can be easily adjusted to fit most wearers. Desco's toe grounders have a lining that prevents carbon marks on shoes. Toe grounder model 17222 has a discrete one megohm resistor built into the contact strip. The product has been tested to ESD STM 97.2 - Floor Materials and Footwear Voltage Measurement in Combination with a Person. It is a suitable ESD footwear component in Flooring - Footwear System when used as the primary grounding method (3.5×10^7 ohms per ESD STM 97.1 Floor Materials and Footwear-Resistance Measurement in Combination with a Person.)


Components:

- A. 0.060" thick, two-layer laminated rubber sole. Inner layer is insulative neoprene, and outer black layer is conductive neoprene. Tear resistant nylon reinforced 4.3 oz. inner scrim layer prevents the rubber from tearing.
- B. 3/8" wide, 18" long blue nylon ribbon contains 8 electrically conductive carbon suffused fibers, reversible, may be positioned on either side of foot.
- C. 3/4" wide blue non-elastic hook material.
- D. 3/4" wide blue stretch loop material, for quick and easy attachment to foot.

UL listed for safety and date coded.

Tab to cup resistance:
10⁶ - 10⁷ Ohms @ 100 volts


ITEM NO.	DESCRIPTION	
17222	Foot Ground, Toe w/1 megohm	UL


Made in America

Our UL listed foot grounders are rated at 250 VAC. It is not recommended to use them where exposure to line voltages above 250 VAC is possible. Caution: The foot grounder is for ESD control. It will not reduce or increase your risk of receiving electric shock when using or working on electrical equipment.

Note:
Two heel straps are recommended for reliable grounding and ESD protection, providing ground when one foot is off the floor.
Operator is grounded when foot is in contact with grounded dissipative or conductive flooring.

Desco recommends the use of foot ground tester Item No. 19252, 19253, 98280/98273, or 98280/98254.
For additional information on the use and maintenance of foot grounders item 17222 is UL listed.



FOOT GROUND, TOE, ADJUSTABLE

DESCO WEST: 3051 WALNUT AVE., CHINO, CA 91710 WEB SITE: Desco.com
PHONE (909) 627-8178 FAX (909) 627-7449
DESCO EAST: ONE COLGATE WAY, CANTON, MA 02021-1407
PHONE (781) 621-8370 FAX (781) 575-9172

DRAWING NUMBER
17222

DATE:
March
2010

© 2010 DESCO INDUSTRIES INC.
employee owned