
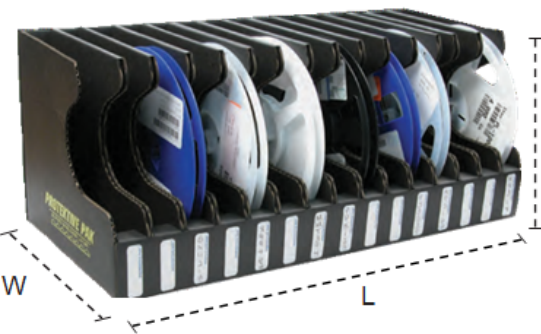



Dissipative Storage




Made in America





Features


- Dissipative impregnated corrugated material
- Economical method of storing reels
- Reel identification labels included
- Each reel storage box has 15 cells or 5 cells for efficient storage
- Partitions are easily removed to accommodate wider reels
- Reusable, ensuring best value
- *Lead-free RoHS compliant*
- Made in America



ITEM #	DESCRIPTION	OUTSIDE DIMENSIONS (L x W x D)
37563	Reel Holder, 7" Reels, 15 Slots	17-1/2" x 8-1/4" x 7-1/4"
37564	Reel Holder, 13" Reels, 15 Slots	17-1/2" x 13-11/16" x 13-1/4"
37565	Reel Holder, 15" Reels, 15 Slots	17-1/2" x 15-5/8" x 15-1/4"
37566	Reel Holder, 7" Reels, 5 Slots	5-3/4" x 8-1/4" x 7-1/4"
37567	Reel Holder, 13" Reels, 5 Slots	5-3/4" x 13-11/16" x 13-1/4"

RoHS Compliance Statement
 None of the following materials are intentionally added in manufacturing this product: lead, mercury, cadmium, hexavalent chromium, polybrominated biphenyls (PBB) or polybrominated diphenyl ethers (PBDE) as outlined in the Directive 2002/95/EC Article 4.1. See Protektive Pak Inc. letter on-line.

SPECIFICATIONS		
Properties	Typical Values	Test Procedures/Method
Electrostatic Decay	0.01 seconds at 72°F and 11.8% R.H.	FED-STD-101, Method 4046
Surface Resistance	10E6 - 10E8 ohms after 11 days at 68°F and 12% R.H. for surface. 10E3 - 10E4 ohms for buried shielding layer per ANSI/ESD S4.1.	ASTM D257 Rockwell International Test Report of December 20, 1991
Surface Resistance, Low R.H. Cut-off	4% R.H.	Rockwell International Test Report of December 20, 1991
High-Voltage Discharge Resistance	Failure rate 0/5 (no oxide damage in five consecutive tests)	EIA 541, appendix E, capacitive probe test
Static Shielding	99.9% attenuation at 10KV; 99.6% attenuation at 30KV	Rockwell International Test Report of December 20, 1991
Charged Device Model (CDM) Safety	RTG >10E6 ohms at 86% R.H. or less	ESD from A to Z
Current-Carrying Hazard	10E3 mA at 110V; 10E3 mA at 220V	FED-STD-101, Method 3005 for reducible sulfur
Corrosivity	Contains 1-3 ppm reducible sulfur	Rockwell International Test Report of January 8, 1992
Antistat Transfer	No transfer	Rockwell International Test Report of January 8, 1992
Water & Isopropyl Alcohol Extraction	Surface resistance 10E6 - 10E8 ohms at 74°F and 36% R.H.	ASTM D4060 at 70 rpm with CS-17 abrasive-coated wheels and 1000 grams load
Tests for Antistat Permanence	Negligible surface damage at 10 cycles and <5% of surface damage at 200 cycles in Taber Abrasion Test. No conductive particles abraded from surface	Rockwell International Test Report of January 8, 1992
Sloughing Test		Rockwell International Test Report of January 8, 1992
Recyclability	Complete recyclability of package	Rockwell International Test Report of January 8, 1992
Biodegradability	Biodegradation in or on moist soil	
Volume Conductivity	Conductivity from wall to wall as well as across surface to assure permanence of the antistatic property	
Shelf Life	Indefinite	



DISSIPATIVE CORRUGATED REEL STORAGE HOLDERS

PROTEKTIVE PAK
 13250 MONTE VISTA AVENUE, CHINO, CA 91710
 PHONE (909) 627-2578, FAX (909) 363-7331
 ProtektivePak.com

DRAWING NUMBER
37563

DATE:
July
2009