



Conductive Parts Trays



Features

- Used to transport or store ESD Sensitive items inside an ESD protected area
- Nesting saves space when storing totes
- Great container for Kanban

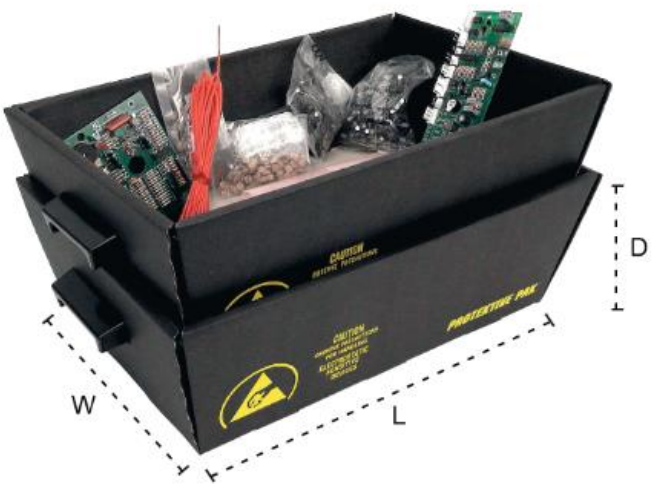

Item No.	O.D. Top Size - L x W x D	I.D. Bottom Size - L x W x D
37620*	12 x 9 x 4	8-3/4 x 5-3/4 x 4
37621	18 x 12 x 6	15 x 8-3/4 x 6
37622	27-1/4 x 12 x 6	24-1/2 x 8-3/4 x 6
37623	27-1/4 x 18 x 6	24-1/2 x 15 x 6

* Not available with handles, assembly required

Meets the required limits of ANSI/ESD S20.20, and Packaging standard ANSI/ESD S541.

SPECIFICATIONS

Properties

Surface Resistance

Sloughing Test

Recyclability

Typical Values

1×10^6 to $< 1 \times 10^9$ ohms

Negligible surface damage at 10 cycles and <5% of surface damage at 200 cycles in Taber Abrasion Test.

No conductive particles abraded from surface

Complete recyclability of package

Test Procedures/Method

ANSI/ESD STM11.11


ASTM D4060 at 70 rpm with CS-17 abrasive-coated wheels and 1000 grams load

Rockwell International Test Report of January 8, 1992

Rockwell International Test Report of January 8, 1992

RoHS 2, REACH, and Conflict Minerals Statement

None of the RoHS 2 restricted materials, or REACH substances of very high concern as of 2014/12/17, or Conflict Minerals are intentionally added in manufacturing this product. Ref. European Union Directive 2011/65/EU and Regulation (EC) No. 1907/2006/CE. See Protektive Pak terms and conditions.



Made in the United States of America

Specifications and procedures subject to change without notice.

NESTING TOTES		
<p>PROTEKTIVE PAK 13520 MONTE VISTA AVENUE, CHINO, CA 91710 PHONE (909) 627-2578, FAX (909) 363-7331 www.protektivepak.com</p>	<p>DRAWING NUMBER 37620</p>	<p>DATE: October 2015</p>

Unless otherwise noted, tolerance is ±10%